

NATURAL FISSURED™

Tile, Square Lay-in & Tegular
medium texture

Recycled Content: **66%**

LEED® Credits


Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views	LEED for Schools	
✓	✓	✓	✓	✓	✓	Acoustics	Low Emitting or CHPS
Location Dependent							✓

Items 536, 507

\$\$\$\$\$

Items 552, 554

\$\$\$\$\$

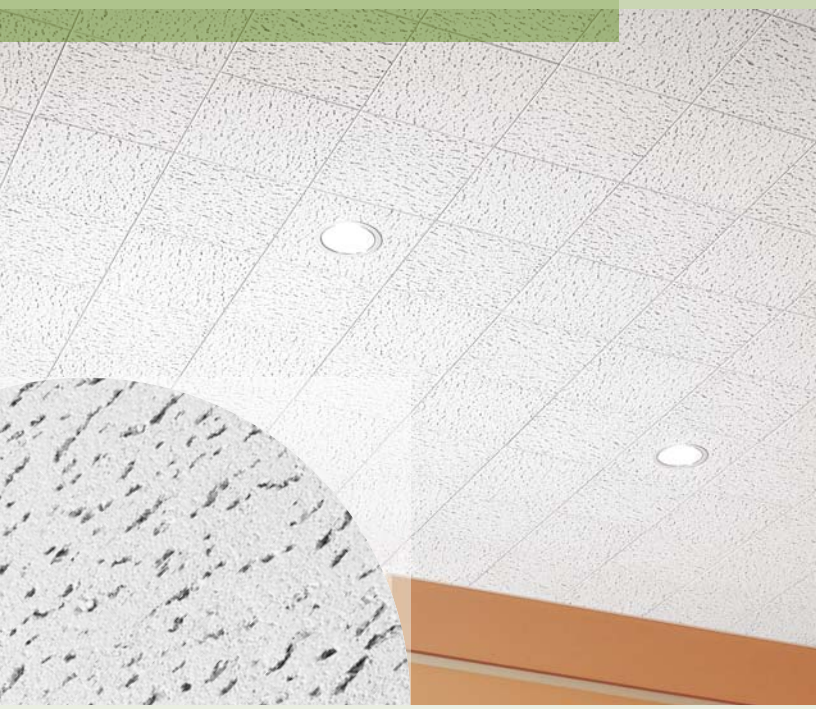

Natural Fissured Beveled Concealed Tile with Prelude® Concealed Grid

Key Selection Attributes

- No visible grid with tile option
- Excellent sound absorption
- 30-Year Limited System Warranty against mold/mildew and bacterial growth

Typical Applications

- Healthcare – assists in addressing HIPAA requirements
- Offices
- Conference rooms
- Lobbies/reception areas
- Dining areas

Color



White (WH)

Visual Selection

Performance Selection Dots represent highest level of performance.

Edge Profile	Item No.	Dimensions	UL Classified		Fire Rating	Light Reflect	Sag Resist	Anti-Microbial	VOC Formaldehyde	Durable	Recycle Program	
			Acoustics NRC	CAC								
NATURAL FISSURED												
Concealed Beveled K4C4	552 552M	1' x 1' x 3/4" 300 x 300 x 19mm	□	0.65	35	Class A	0.83	S	BioBlock+	No Added	S	Yes
Square K4C4	554 554M	1' x 1' x 3/4" 300 x 300 x 19mm	□	0.65	35	Class A	0.83	S	•	No Added	S	•
15/16" Square Lay-in	536 536M	2' x 2' x 3/4" 600 x 600 x 19mm	□	0.65	35	Class A	0.83	S	•	No Added	S	•
Angled Tegular	507 507M	2' x 2' x 3/4" 600 x 600 x 19mm	□	0.65	35	Class A	0.83	S	•	No Added	S	•

S = Standard

Suspension Systems

15/16"	Standard: Prelude®
Concealed	Standard: Prelude Concealed, Adhesive

Physical Data

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification
Type III, Form 1, Pattern C D
Fire Class A

No-Added Formaldehyde
No-added formaldehyde – free of formaldehyde-based resins. Outperform CHPS Section 01350 requirements. (Independent test reports available upon request.)

Anti Mold/Mildew & Bacteria
BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

Insulation Value
R Factor - 1.5 (BTU units)
R Factor - 0.26 (Watts units)

Backloading Recommendation
Contact TechLine for specific information

30-Year Performance Guarantee & Warranty Information
See warranty details at armstrong.com/warranty

Application Considerations
Item 554 – 1' x 1' square edge tiles: Not recommended in applications where indirect lighting or grazing lighting is used

Weight; Square Feet/Carton
507, 536 – 1.08 lbs/SF; 48 SF/ctn
552 – 1.08 lbs/SF; 40 SF/ctn
554 – 1.18 lbs/SF; 40 SF/ctn

TechLine™ / 1 877 ARMSTRONG
1 877 276 7876
armstrong.com/ceilings
(search: natural fissured)
CS-3033-109

