

### Key Selection Attributes

- Threaded screw-slot reveal for easy partition attachment using a 5/16" – 18 N.C. thread screw
- Painted extruded aluminum construction for excellent corrosion resistance
- Integral hook-type end detail for secure locked connection and easy removability
- 10-year limited warranty; 15-year with **HumiGuard Plus** products

### Typical Applications

- Offices
- Lobbies
- Corridors
- Conference rooms

Recycled Content:

**50%**

## Visual Selection

## Performance Selection

GRID FACE	ITEM NUMBER	DESCRIPTION	DIMENSIONS	HANGER SPACING*		FIRE/FLAME	FIRE GUARD ITEM #	FIRE GUARD HANGER SPACING*		SEISMIC ZONE	ASTM/DUTY CLASS
				4 Ft.	5 Ft.			4 Ft.	5 Ft.		
<b>TRIMLOK</b>											
9/16"	2155	12' ID Main Beam Notched 24" OC	144 x 9/16 x 1-7/8 x 5/16"	12.84	-	-	-	-	-	Zone 0-2	ID
9/16"	2159	10' HD Main Beam Notched 60" OC	120 x 9/16 x 2-1/4 x 5/16"	29.16	15.56	-	-	-	-	Zone 0-2	HD
9/16"	2160	5' Cross Tee No Notch	60 x 9/16 x 2-1/4 x 5/16"	-	-	-	-	-	-	Zone 0-2	-
9/16"	2161	5' Cross Tee No Notch	60 x 9/16 x 1-7/8 x 5/16"	-	-	-	-	-	-	Zone 0-2	-
9/16"	2156	4' Cross Tee Notched Both Sides	48 x 9/16 x 1-7/8 x 5/16"	11.01	-	-	-	-	-	Zone 0-2	-
9/16"	2157	4' Cross Tee No Notch	48 x 9/16 x 1-7/8 x 5/16"	11.01	-	-	-	-	-	Zone 0-2	-
9/16"	2158	2' Cross Tee No Notch	24 x 9/16 x 1-7/8 x 5/16"	73.51	-	-	-	-	-	Zone 0-2	-
9/16"	2162	20" Bridging Tee No Notch	20 x 9/16 x 1-7/8 x 5/16"	-	-	-	-	-	-	Zone 0-2	-
9/16"	2163	1' Bridging Tee	12 x 9/16 x 1-7/8 x 5/16"	-	-	-	-	-	-	Zone 0-2	-
<b>Molding</b>											
3/4"	2128	12' Angle Molding	144 x 3/4 x 3/4"	-	-	-	-	-	-	-	-
1/2"	2129	12' Shadow Molding	144 x 1 x 1/2 x 1/2 x 1"	-	-	-	-	-	-	-	-

\* Simple Span

ASTM Class  
 HD - Heavy-duty  
 ID - Intermediate-duty  
 LD - Light-duty

## Color Selection





White (WH)

## Details



TRIMLOK Main Beam

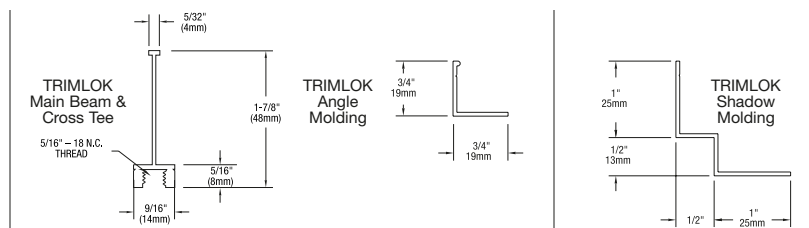

general application / screw-slot system



Pattern Available Globally